
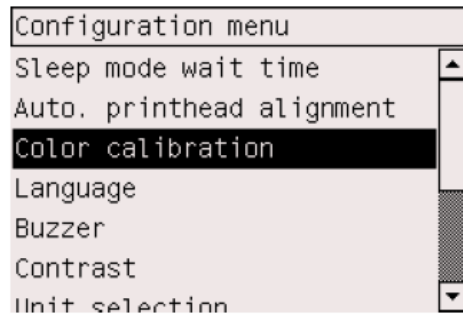




Calibrate my printer


Printer: HP Designjet 4000/4000ps

1. Select to perform the color calibration automatically, choose the **printer icon**  from the front panel, then **Configuration menu > Color calibration: ON**.



The color calibration will be performed whenever a printhead is replaced or a new paper type is introduced that has not been calibrated yet with the new printhead(s).

2. The color calibration could be performed manually, for instance when the environment condition change (temperature or humidity) or when you notice deterioration in the quality of your prints.

Select **ink icon**  from the front panel, then **Printheads > Calibrate color**.

3. The printer calibrates the color by printing a calibration strip, scanning the strip with a built-in optical sensor, and calculating the color corrections required.

For more information on HP Designjet products

www.hp.com/go/designjet

© 2005 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Adobe Photoshop and PostScript are trademarks of Adobe Systems Incorporated. PANTONE is Pantone, Inc.'s check-standard trademark for color.

Rev. 1.0, 08/2005

